COSWICK HARDWOOD FLOORING | TECHNICAL INFORMATION

Product # 1154-3217

COSWICK
Solid Hardwood Floors

COLLECTION | COUNTRY
COLOR | MILK CHOCOLATE

Wood species | Oak
Grade | 1 Common
Constructions | 3-layer T&G Engineered Flooring
Size | 19,05 x 127 x 600...2100 mm (¾" x 5" x 2'...7')
Finish | Silk finish

CONSTRUCTION : 3-LAYER T&G ENGINEERED FLOORING

DIMENSIONS :	
Thickness	19,05 mm (¾")
Width	127 mm (5")
Length	600 ...2100 mm (2'...7')
Average length	1,0 m (3 5⁄16')
Microbevel	0,5 mm
Joint type	tongue and groove (T&G)

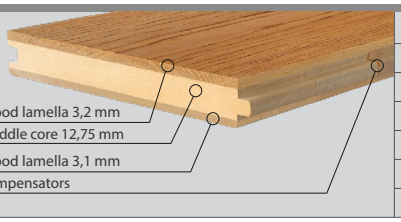

PACKAGING :	BOX	PALLET
Content:	2,0 m²	36 (72,0 m²)
Weight	25 kg	927 kg
H x W x L	85 x 280 x 2153 mm	1140 x 845 x 2160 mm
Content:	21,52 sq.ft.	774,72 sq.ft.
Weight	56 lb	2051 lb
H x W x L	3" x 11" x 85"	45" x 33" x 85"

DEVIATIONS :		
Deviation on Thickness	± 0,2 mm	EN 13489 ГОСТ 862.3
Deviation on Width	± 0,2 mm	
Height Difference	≤ 0,2 % of width	
Cup	≤ 0,2 % of plank width	
Spring	≤ 0,1 % of length	EN 13489
Bow	≤ 0,5 % of length	

CHARACTERISTICS :		
Fire resistance	Dfl-s1	EN 14342
Formaldehyde emission class	E1	
Pentachlorophenol content	None	
Thermal resistance	0,118 m²·K/W	
Thermal conductivity	0,161 W/(m·K)	
Structural warranty	Lifetime	

INSTALLATION :

Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level. Suitable for installation over radiant heating systems.

STORAGE AND USAGE :

— Air humidity 40% – 65%
— Temperature +18 °C – +22 °C

FINISH : SILK FINISH

DESCRIPTION :	
Type of coating	UV-cured modified polyurethane-acrylate
Surface (finish) type	Semi-closed pores, wire brushed
Sheen	Silk matte 9-18 GU/85°
Finish warranty	-

CLASSIFICATION SURFACE CHARACTERISTICS :		
Wear resistance	Not rated	EN 438-2
Scratch resistance	Not rated	EN 438
Slip resistance	50 (SRV dry)	EN 15676
Resistance to chemical agents	Class 5 (Except blue ink)	EN 13442
Repairability	Medium	

MAINTENANCE AND CARE CONDITIONS :

Maintenance of hardwood floors with Silk finish assumes regular (daily if necessary) cleaning from dust and grit using a vacuum, followed by a thorough cleaning with Coswick Hardwood Floor Cleaner or other similar product. Floor surface areas that receive the most traffic and get worn down quicker, such as areas by the front door, hallways, kitchens etc., should be periodically renewed with special Coswick Restorative Oil. This product restores the protective surface film. Frequency of use depends on type of interior and intensity of foot traffic. For residential interiors, restorative cleaning should be done once in 3-5 years; for public and commercial interiors with intense foot traffic, it is recommended to use the product 2-4 times a year.

GRADE : 1 COMMON

DESCRIPTION :		DESCRIPTION :	
Sound sapwood	Permitted contrast to 25% of the plank area	Bark pocket	Permitted up to 50 mm in lenght, up to 5 mm in width, filled
Colour variation	No limit	Pith	Permitted
Knot	Permitted up to 25 mm, filled	Slope of grain	Permitted
Crecks	Permitted narrow, filled	Medullary ray	Permitted

Coswick Ltd.
2B Kolasa Str., 223034 Zaslavl, Republic of Belarus
Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com
www.coswick.com

nwfa National Wood Flooring Association
ECO FRIENDLY
No added formaldehyde
CTE ISO 9001
TP BY
CE