





# HERRINGBONE 90° | TECHNICAL INFORMATION

Product # 1151-3822-20

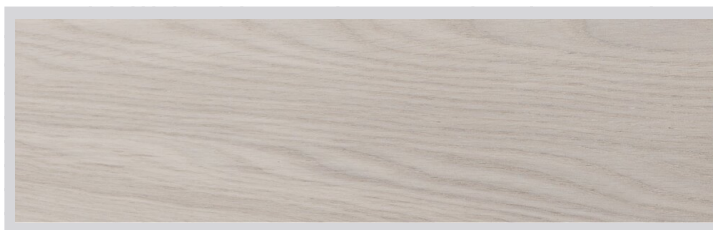

## WHITE BREATHE COLLECTION DECOR | ALBATROSS RUSTIC

**Wood species** | Oak  
**Selection** | 1 Common  
**Pattern** | Herringbone  
**Constructions** | 3-layer flooring G&G  
**Size** | 15x82,55x330.2 mm (5/8"x3 1/4"x13")  
**Finish** | Silk mat finish

### CONSTRUCTION: 3-LAYER FLOORING G&G

DIMENSIONS :			PACKAGING :		
			BOX	PALLET	
Thickness	15 mm (5/8")		Content	1,908 m2	54 box (103,032 m2)
Width	82,55 mm (3 1/4")		Weigh	20 kg	1094 kg
Length	330.2 mm (13")		H x W x L	155 x 345 x 620 mm	1080 x 1 065 x 2 020 mm
Cut angle	90°		Content	20,530 sq.ft.	1108,624 sq.ft.
Microbevel	0,5 mm		Weigh	21 lb	1118 lb
Joint type	G&G		H x W x L	6" x 14" x 25" mm	43" x 42" x 80" mm

### DEVIATIONS:

Deviation on Thickness	± 0,2 mm	EN 13489 ГОСТ 862.3
Deviation on Length	± 0,3 mm	
Deviation on Width	± 0,2 mm	
Height Difference	≤ 0,2 mm on 100 mm length	
Cup	≤ 0,2 % of width	
Bow	≤ 0,5 % of length	EN 13489
Spring	≤ 0,1 % of length	

### CHARACTERISTICS:

Fire resistance	Dfl-s1	EN 14342
Formaldehyde emission class	E1	
Pentachlorophenol content	None	
Thermal resistance	0,095 m2 K/W	
Thermal conductivity	0,158 W/(m·K)	
Structural warranty	Lifetime	

### УСТАНОВКА:



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level. Suitable for installation over radiant heating systems.

### УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



— Air humidity 40% – 65%  
 — Temperature +18 °C – +22 °C

### FINISH : SILK MAT FINISH

### GRADE : 1 COMMON

DESCRIPTION:		DESCRIPTION:	
Sound sapwood	Non-contrasting sapwood is allowed up to 25% of board width	Bark pocket	Permitted up to 50 mm in length, up to 5 mm in width, filled
Colour variation	Moderate contrast allowed	Pith	Permitted
Knot	Permitted up to 25 mm, filled	Slope of grain	Permitted
Crecks	Permitted narrow, filled	Medullary ray	Permitted

### COSWICK Ltd.

2B Kolasa Str., 223034 Zaslavl, Republic of Belarus  
 Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com  
 www.coswick.com

