





# HERRINGBONE 90° | TECHNICAL INFORMATION

Product # 1168-3822-20

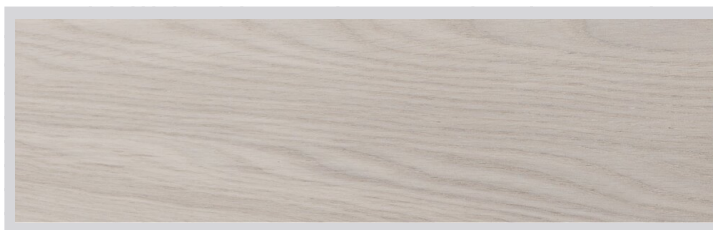

## WHITE BREATHE COLLECTION DECOR | ALBATROSS RUSTIC

**Wood species** | Oak  
**Selection** | 1 Common  
**Pattern** | Herringbone  
**Constructions** | 3-layer flooring T&G  
**Size** | 15x107,95x647.7 mm (5/8"x4 1/4"x25 1/2")  
**Finish** | Silk mat finish

### CONSTRUCTION: 3-LAYER FLOORING T&G

DIMENSIONS :			PACKAGING :	
			BOX	PALLET
Thickness	15 mm (5/8")	Content	2,1 m2	42 box (88,2 m2)
Width	107,95 mm (4 1/4")	Weigh	22 kg	923 kg
Length	647.7 mm (25 1/2")	H x W x L	155 x 340 x 677 mm	1230 x 680 x 2 020 mm
Cut angle	90°	Content	22,596 sq.ft.	949,032 sq.ft.
Microbevel	0,5 mm	Weigh	22 lb	947 lb
Joint type	T&G	H x W x L	6" x 14" x 27" mm	49" x 27" x 80" mm

### DEVIATIONS:

Deviation on Thickness	± 0,2 mm	EN 13489 ГОСТ 862.3
Deviation on Length	± 0,3 mm	
Deviation on Width	± 0,2 mm	
Height Difference	≤ 0,2 mm on 100 mm length	
Cup	≤ 0,2 % of width	EN 13489
Bow	≤ 0,5 % of length	
Spring	≤ 0,1 % of length	

### CHARACTERISTICS:

Fire resistance	Dfl-s1	EN 14342
Formaldehyde emission class	E1	
Pentachlorophenol content	None	
Thermal resistance	0,095 m2 K/W	
Thermal conductivity	0,158 W/(m·K)	
Structural warranty	Lifetime	

### УСТАНОВКА:



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level. Suitable for installation over radiant heating systems.

### УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



— Air humidity 40% – 65%  
 — Temperature +18 °C – +22 °C

### FINISH : SILK MAT FINISH

### GRADE : 1 COMMON

DESCRIPTION:		DESCRIPTION:	
Sound sapwood	Non-contrasting sapwood is allowed up to 25% of board width	Bark pocket	Permitted up to 50 mm in length, up to 5 mm in width, filled
Colour variation	Moderate contrast allowed	Pith	Permitted
Knot	Permitted up to 25 mm, filled	Slope of grain	Permitted
Crecks	Permitted narrow, filled	Medullary ray	Permitted

### COSWICK Ltd.

2B Kolasa Str., 223034 Zaslavl, Republic of Belarus  
 Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com  
 www.coswick.com

