




# HERRINGBONE 90° | TECHNICAL INFORMATION

Product # 1171-4827-20

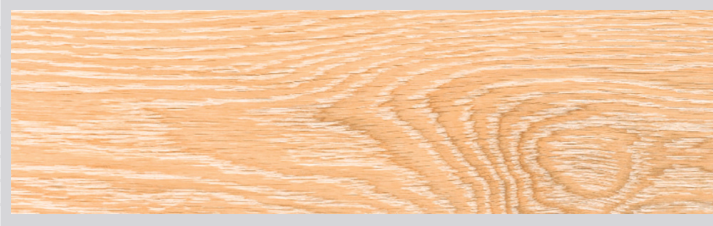

## WHITE BREATHE COLLECTION DECOR | BARCELONA

**Wood species** | Oak  
**Selection** | Tavern  
**Pattern** | Herringbone  
**Constructions** | 3-layer flooring T&G  
**Size** | 15x82,55x577.85 mm (5/8"x3 1/4"x22 3/4")  
**Finish** | Silk mat finish

### CONSTRUCTION: 3-LAYER FLOORING T&G

| DIMENSIONS : |                     |           | PACKAGING :        |                         |
|--------------|---------------------|-----------|--------------------|-------------------------|
|              |                     |           | BOX                | PALLET                  |
| Thickness    | 15 mm (5/8")        | Content   | 1,908 m2           | 54 box (103,032 m2)     |
| Width        | 82,55 mm (3 1/4")   | Weigh     | 20 kg              | 1094 kg                 |
| Length       | 577.85 mm (22 3/4") | H x W x L | 155 x 345 x 620 mm | 1080 x 1 065 x 2 020 mm |
| Cut angle    | 90°                 | Content   | 20,530 sq.ft.      | 1108,624 sq.ft.         |
| Microbevel   | 0,5 mm              | Weigh     | 21 lb              | 1118 lb                 |
| Joint type   | T&G                 | H x W x L | 6" x 14" x 25" mm  | 43" x 42" x 80" mm      |

### DEVIATIONS:

|                        |                           |                        |
|------------------------|---------------------------|------------------------|
| Deviation on Thickness | ± 0,2 mm                  | EN 13489<br>ГОСТ 862.3 |
| Deviation on Length    | ± 0,3 mm                  |                        |
| Deviation on Width     | ± 0,2 mm                  |                        |
| Height Difference      | ≤ 0,2 mm on 100 mm length |                        |
| Cup                    | ≤ 0,2 % of width          | EN 13489               |
| Bow                    | ≤ 0,5 % of length         |                        |
| Spring                 | ≤ 0,1 % of length         |                        |

### CHARACTERISTICS:

|                             |               |          |
|-----------------------------|---------------|----------|
| Fire resistance             | Dfl-s1        | EN 14342 |
| Formaldehyde emission class | E1            |          |
| Pentachlorophenol content   | None          |          |
| Thermal resistance          | 0,095 m2 K/W  |          |
| Thermal conductivity        | 0,158 W/(m·K) |          |
| Structural warranty         | Lifetime      |          |

### УСТАНОВКА:



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level. Suitable for installation over radiant heating systems.

### УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



— Air humidity 40% – 65%  
— Temperature +18 °C – +22 °C

### FINISH : SILK MAT FINISH

### GRADE : TAVERN

| DESCRIPTION:     |                                     | DESCRIPTION:   |                          |
|------------------|-------------------------------------|----------------|--------------------------|
| Sound sapwood    | Up to 25% of board width is allowed | Bark pocket    | No limit (after filling) |
| Colour variation | Moderate contrast allowed           | Pith           | Permitted                |
| Knot             | Permitted big, filled               | Slope of grain | Permitted                |
| Crecks           | Permitted wide, filled              | Medullary ray  | Permitted                |

### COSWICK Ltd.

2B Kolasa Str., 223034 Zaslavl, Republic of Belarus  
Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com  
www.coswick.com

