




# PLANK HARDWOOD FLOORING | TECHNICAL INFORMATION

Product # 1163-7814-20



## NATURAL TOUCH COLLECTION

**DECOR |** BARN

**Wood species |** Oak

**Selection |** Character

**Constructions |** 3-layer flooring T&G


**Size |** 19,05x190x600...2100 mm (3/4"x7 1/2"x2'...7')

**Finish |** Silk mat finish

## CONSTRUCTION: 3-LAYER FLOORING T&G

### DIMENSIONS :

Thickness	19,05 mm (3/4")
Width	190 mm (7 1/2")
Length	600...2100 (2'...7')
Average length	1.22 m (4')
Microbevel	0,5 mm
Joint type	T&G

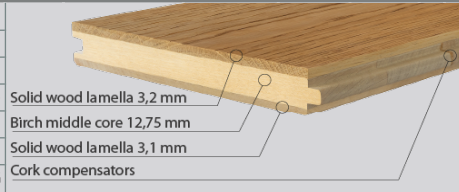

### PACKAGING :

	BOX	PALLET
Content	1,86 m <sup>2</sup>	40 box (74,4 m <sup>2</sup> )
Weigh	23 kg	950 kg
H x W x L	100 x 225 x 2 165 mm	1134 x 905 x 2 165 mm
Content	20,014 sq.ft.	800,544 sq.ft.
Weigh	24 lb	962 lb
H x W x L	4" x 9" x 86" mm	46" x 33" x 86" mm

### DEVIATIONS:

Deviation on Thickness	± 0,2 mm	
Deviation on Width	± 0,2 mm	EN 13489
Height Difference	≤ 0,2 mm on 100 mm length	ГОСТ 862.3
Cup	≤ 0,2 % of width	
Bow	≤ 0,5 % of length	
Spring	≤ 0,1 % of length	EN 13489

### CHARACTERISTICS:

Fire resistance	Dfl-s1	
Formaldehyde emission class	E1	
Pentachlorophenol content	None	EN 14342
Thermal resistance	0,082 m <sup>2</sup> K/W	
Thermal conductivity	0,161 W/(m·K)	
Structural warranty	Lifetime	

### УСТАНОВКА:



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level. Suitable for installation over radiant heating systems.

### УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



— Air humidity 40% – 65%  
— Temperature +18 °C – +22 °C

**FINISH :** SILK MAT FINISH

**GRADE :** CHARACTER

DESCRIPTION:		DESCRIPTION:	
Sound sapwood	Up to 25% of board width is allowed	Bark pocket	No limit (after filling)
Colour variation	Moderate contrast allowed	Pith	Permitted
Knot	Permitted big, filled	Slope of grain	Permitted
Crecks	Permitted wide, filled	Medullary ray	Permitted

COSWICK Ltd.

2B Kolasa Str., 223034 Zaslavl, Republic of Belarus

Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com

www.coswick.com

