





# MOSAIC WOOD FLOORS FLOORS | TECHNICAL INFORMATION

Product # 1197-3870-30

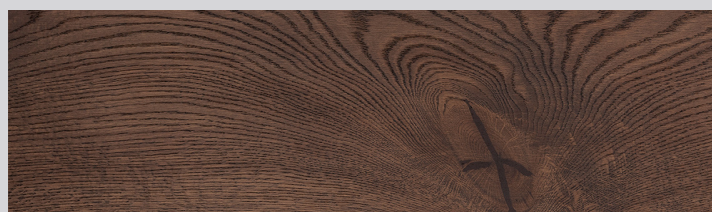

## DESIGNER SOLUTION COLLECTION DECOR | EDINBURGH

**Wood species** | Oak  
**Selection** | 1 Common  
**Pattern** | Tile  
**Constructions** | 3-layer flooring T&G  
**Size** | 15x190x220 mm (5/8"x7 1/2"x8 5/8")  
**Finish** | Silk mat finish

### CONSTRUCTION: 3-LAYER FLOORING T&G

| DIMENSIONS : |                 |           | PACKAGING :        |                       |
|--------------|-----------------|-----------|--------------------|-----------------------|
|              |                 |           | BOX                | PALLET                |
| Thickness    | 15 mm (5/8")    | Content   | 1,634 m2           | 40 box (65,36 m2)     |
| Width        | 190 mm (7 1/2") | Weigh     | 17 kg              | 694 kg                |
| Length       | 220 mm (8 5/8") | H x W x L | 195 x 405 x 470 mm | 1113 x 800 x 1 880 mm |
| Microbevel   | 0,5 mm          | Content   | 17,582 sq.ft.      | 703,274 sq.ft.        |
| Joint type   | T&G             | Weigh     | 17 lb              | 718 lb                |
|              |                 | H x W x L | 8" x 16" x 22" mm  | 44" x 32" x 74" mm    |

### DEVIATIONS:

|                           |                   |                        |
|---------------------------|-------------------|------------------------|
| Deviation on Thickness    | ± 0,2 mm          | EN 13489<br>ГОСТ 862.3 |
| Deviation on Length       | ± 0,3 mm          |                        |
| Deviation on Width        | ± 0,2 mm          |                        |
| Angle deviation of planks | ≤ 0,25 mm         | EN 13489               |
| Cup                       | ≤ 0,2 % of width  |                        |
| Bow                       | ≤ 0,5 % of length |                        |
| Spring                    | ≤ 0,1 % of length |                        |

### CHARACTERISTICS:

|                             |               |          |
|-----------------------------|---------------|----------|
| Fire resistance             | Dfl-s1        | EN 14342 |
| Formaldehyde emission class | E1            |          |
| Pentachlorophenol content   | None          |          |
| Thermal resistance          | 0,095 m2 K/W  |          |
| Thermal conductivity        | 0,158 W/(m·K) |          |
| Structural warranty         | Lifetime      |          |

### УСТАНОВКА:



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level. Suitable for installation over radiant heating systems.

### УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



— Air humidity 40% – 65%  
 — Temperature +18 °C – +22 °C

### FINISH: SILK MAT FINISH

### GRADE: 1 COMMON

| DESCRIPTION:     |   | DESCRIPTION:   |  |
|------------------|---|----------------|--|
| Sound sapwood    | Non-contrasting sapwood is allowed up to 25% of board width | Bark pocket    | Permitted up to 50 mm in length, up to 5 mm in width, filled |
| Colour variation | Moderate contrast allowed                                   | Pith           | Permitted  |
| Knot             | Permitted up to 25 mm, filled                               | Slope of grain | Permitted  |
| Crecks           | Permitted narrow, filled                                    | Medullary ray  | Permitted  |

#### COSWICK Ltd.

2B Kolasa Str., 223034 Zaslavl, Republic of Belarus  
 Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com  
 www.coswick.com

