





# PLANK HARDWOOD FLOORING | TECHNICAL INFORMATION

Product # 1363-3810-30

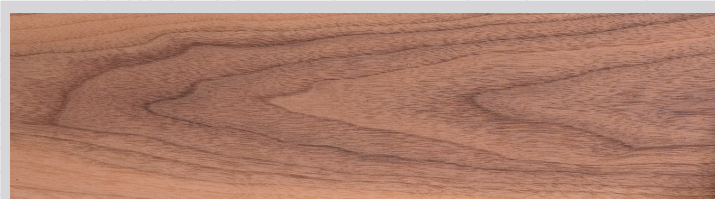

## AMERICAN WALNUT COLLECTION DECOR | FOGGY DAWN

**Wood species** | American Walnut  
**Selection** | 1 Natur  
**Constructions** | 3-layer flooring T&G  
**Size** | 19,05x190x600...2100 mm (3/4"x7 1/2"x2'...7')  
**Finish** | Silk mat finish

### CONSTRUCTION: 3-LAYER FLOORING T&G

DIMENSIONS :			PACKAGING :	
			BOX	PALLET
Thickness	19,05 mm (3/4")	Content	1,86 m2	40 box (74,4 m2)
Width	190 mm (7 1/2")	Weigh	23 kg	950 kg
Length	600...2100 (2'...7')	H x W x L	100 x 225 x 2 165 mm	1134 x 905 x 2 165 mm
Average length	1.22 m (4')	Content	20,014 sq.ft.	800,544 sq.ft.
Microlevel	0,5 mm	Weigh	24 lb	962 lb
Joint type	T&G	H x W x L	4" x 9" x 86" mm	46" x 33" x 86" mm

### DEVIATIONS:

Deviation on Thickness	± 0,2 mm	EN 13489 FOCT 862.3
Deviation on Width	± 0,2 mm	
Height Difference	≤ 0,2 mm on 100 mm length	
Cup	≤ 0,2 % of width	EN 13489
Bow	≤ 0,5 % of length	
Spring	≤ 0,1 % of length	

### CHARACTERISTICS:

Fire resistance	Dfl-s1	EN 14342
Formaldehyde emission class	E1	
Pentachlorophenol content	None	
Thermal resistance	0,118 m2·K/W	
Thermal conductivity	0,161 W/(m·K)	
Structural warranty	Lifetime	

### УСТАНОВКА:



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level.

### УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



— Air humidity 40% – 65%  
 — Temperature +18 °C – +22 °C

### FINISH: SILK MAT FINISH

### GRADE: 1 NATUR

DESCRIPTION:		DESCRIPTION:	
Sound sapwood	No limit	Bark pocket	Permitted up to 50 mm in length, up to 5 mm in width, filled
Colour variation	No limit	Pith	Permitted
Knot	Permitted up to 60 mm, filled	Slope of grain	Permitted
Crecks	Permitted narrow, filled	Medullary ray	Permitted

COSWICK Ltd.

2B Kolasa Str., 223034 Zaslavl, Republic of Belarus

Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com

www.coswick.com

