





# MOSAIC WOOD FLOORS I TECHNICAL INFORMATION

Product # 1350-1101-30

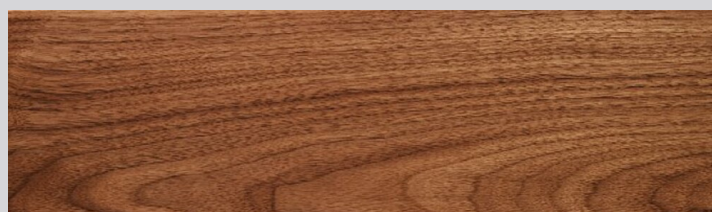

## AMERICAN WALNUT COLLECTION DECOR | NATURAL

**Wood species** | American Walnut

**Selection** | Select & Better

**Pattern** | Coffee Bean

**Constructions** | 3-layer flooring T&G

**Size** | 19,05x127x433,8 mm (3/4"x5"x17 1/16")

**Finish** | Lacquer finish

### CONSTRUCTION: 3-LAYER FLOORING T&G

| DIMENSIONS :   |                  |           | PACKAGING :        |                       |
|----------------|------------------|-----------|--------------------|-----------------------|
|                |                  |           | BOX                | PALLET                |
| Thickness      | 19,05 mm (3/4")  | Content   | 1,38 m2            | 40 box (55,2 m2)      |
| Width          | 127 mm (5")      | Weigh     | 17 kg              | 702 kg                |
| Length         | 433,8 (17 1/16") | H x W x L | 195 x 405 x 575 mm | 1091 x 800 x 2 000 mm |
| Average length |                  | Content   | 14,849 sq.ft.      | 593,952 sq.ft.        |
| Microbevel     | 0,5 mm           | Weigh     | 18 lb              | 727 lb                |
| Joint type     | T&G              | H x W x L | 8" x 16" x 23" mm  | 43" x 32" x 79" mm    |


### DEVIATIONS:

|                           |                   |                        |
|---------------------------|-------------------|------------------------|
| Deviation on Thickness    | ± 0,2 mm          | EN 13489<br>ГОСТ 862.3 |
| Deviation on Length       | ± 0,3 mm          |                        |
| Deviation on Width        | ± 0,2 mm          |                        |
| Angle deviation of planks | ≤ 0,25 mm         |                        |
| Cup                       | ≤ 0,2 % of width  | EN 13489               |
| Bow                       | ≤ 0,5 % of length |                        |
| Spring                    | ≤ 0,1 % of length |                        |


### CHARACTERISTICS:

|                             |               |          |
|-----------------------------|---------------|----------|
| Fire resistance             | Dfl-s1        | EN 14342 |
| Formaldehyde emission class | E1            |          |
| Pentachlorophenol content   | None          |          |
| Thermal resistance          | 0,118 m2·K/W  |          |
| Thermal conductivity        | 0,161 W/(m·K) |          |
| Structural warranty         | Lifetime      |          |

### УСТАНОВКА:



### УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



### FINISH : LACQUER FINISH

| DESCRIPTION :         |  |
|-----------------------|--|
| Type of coating       | UV-curable polyurethane-acrylate with micro-corundum |
| Surface (finish) type | Closed pores   |
| Sheen                 | Semigloss, 30-40 GU-60°                              |
| Finish warranty       | 25 years   |

### CLASSIFICATION SURFACE CHARACTERISTICS:

|                               |  |          |
|-------------------------------|--|----------|
| Wear resistance               | Taber Test - 500 turns (S 42; 1000 gr) | EN 438-2 |
| Scratch resistance            | Rating 3                               | EN 438   |
| Slip resistance               | 46 (SRV dry)                           | EN 15676 |
| Resistance to chemical agents | Class 5 (Except blue ink)              | EN 13442 |
| Repairability                 | Low                                    |          |

### MAINTENANCE AND CARE CONDITIONS :

Maintenance of hardwood floors with lacquer CosNanoTech+ finish assumes regular (daily if necessary) cleaning from dust and dirt using a vacuum, followed by a thorough cleaning using Coswick hardwood floor cleaner or other similar product. Due to high wear resistance properties, CosNanoTech+ lacquer finish does not require any additional care or finish renewal throughout the entire life of the floor.

### GRADE : SELECT & BETTER

| DESCRIPTION:     |  | DESCRIPTION:   |  |
|------------------|--|----------------|--|
| Sound sapwood    | Non-contrasting up to 25% of plank width allowed | Bark pocket    | Permitted up to 10 mm in length, up to 3 mm in width, filled |
| Colour variation | Permitted slight colour variation                | Pith           | Permitted healthy heart                                      |
| Knot             | Permitted up to 10 mm, filled                    | Slope of grain | Permitted  |
| Crecks           | Not permitted                                    | Medullary ray  | Permitted  |

COSWICK Ltd.

2B Kolasa Str., 223034 Zaslavl, Republic of Belarus

Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com

www.coswick.com

