





PLANK HARDWOOD FLOORING | TECHNICAL INFORMATION

Product # 1367-1101-30

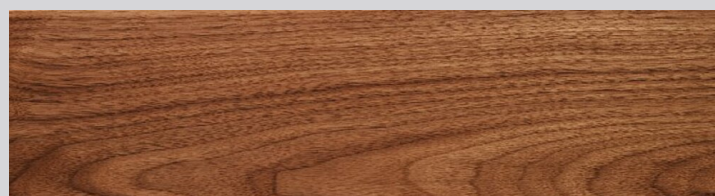

AMERICAN WALNUT COLLECTION DECOR | NATURAL

Wood species | American Walnut
Selection | Select & Better
Constructions | 3-layer flooring T&G
Size | 15x127x600...2100 mm (5/8"x5"x2'...7")
Finish | Lacquer finish

CONSTRUCTION: 3-LAYER FLOORING T&G

| DIMENSIONS : | | | PACKAGING : | |
|----------------|----------------------|-----------|----------------------|-----------------------------|
| | | | BOX | PALLET |
| Thickness | 15 mm (5/8") | Content | 2 m ² | 40 box (80 m ²) |
| Width | 127 mm (5") | Weigh | 21 kg | 842 kg |
| Length | 600...2100 (2'...7') | H x W x L | 128 x 160 x 2 150 mm | 1136 x 810 x 2 163 mm |
| Average length | 0.98 m (3 1/4') | Content | 21,520 sq.ft. | 860,800 sq.ft. |
| Microlevel | 0,5 mm | Weigh | 22 lb | 854 lb |
| Joint type | T&G | H x W x L | 5" x 7" x 85" mm | 45" x 32" x 86" mm |

DEVIATIONS:

| | | |
|------------------------|---------------------------|------------------------|
| Deviation on Thickness | ± 0,2 mm | EN 13489 FOCT 862.3 |
| Deviation on Width | ± 0,2 mm | |
| Height Difference | ≤ 0,2 mm on 100 mm length | |
| Cup | ≤ 0,2 % of width | EN 13489 |
| Bow | ≤ 0,5 % of length | |
| Spring | ≤ 0,1 % of length | |

CHARACTERISTICS:

| | | |
|-----------------------------|--------------------------|----------|
| Fire resistance | Dfl-s1 | EN 14342 |
| Formaldehyde emission class | E1 | |
| Pentachlorophenol content | None | |
| Thermal resistance | 0,095 m ² K/W | |
| Thermal conductivity | 0,158 W/(m·K) | |
| Structural warranty | Lifetime | |

УСТАНОВКА:



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level.

УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



— Air humidity 40% – 65%
 — Temperature +18 °C – +22 °C

FINISH : LACQUER FINISH

| DESCRIPTION : | |
|-----------------------|--|
| Type of coating | UV-curable polyurethane-acrylate with micro-corundum |
| Surface (finish) type | Closed pores |
| Sheen | Semigloss, 30-40 GU-60° |
| Finish warranty | 25 years |

CLASSIFICATION SURFACE CHARACTERISTICS:

| | | |
|-------------------------------|--|----------|
| Wear resistance | Taber Test - 500 turns (S 42; 1000 gr) | EN 438-2 |
| Scratch resistance | Rating 3 | EN 438 |
| Slip resistance | 46 (SRV dry) | EN 15676 |
| Resistance to chemical agents | Class 5 (Except blue ink) | EN 13442 |
| Repairability | Low | |

MAINTENANCE AND CARE CONDITIONS :

Maintenance of hardwood floors with lacquer CosNanoTech+ finish assumes regular (daily if necessary) cleaning from dust and dirt using a vacuum, followed by a thorough cleaning using Coswick hardwood floor cleaner or other similar product. Due to high wear resistance properties, CosNanoTech+ lacquer finish does not require any additional care or finish renewal throughout the entire life of the floor.

GRADE : SELECT & BETTER

| DESCRIPTION: | | DESCRIPTION: | |
|------------------|--|----------------|--|
| Sound sapwood | Non-contrasting up to 25% of plank width allowed | Bark pocket | Permitted up to 10 mm in length, up to 3 mm in width, filled |
| Colour variation | Permitted slight colour variation | Pith | Permitted healthy heart |
| Knot | Permitted up to 10 mm, filled | Slope of grain | Permitted |
| Crecks | Not permitted | Medullary ray | Permitted |

COSWICK Ltd.

2B Kolasa Str., 223034 Zaslavl, Republic of Belarus
 Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com
 www.coswick.com

