





# PLANK HARDWOOD FLOORING | TECHNICAL INFORMATION

Product # 1372-1101-30

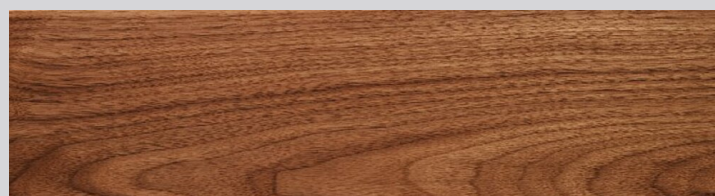

## AMERICAN WALNUT COLLECTION DECOR | NATURAL

**Wood species** | American Walnut

**Selection** | Select & Better

**Constructions** | 3-layer flooring T&G

**Size** | 15x190x600...2100 mm (5/8"x7' 1/2"x2'...7')

**Finish** | Lacquer finish

### CONSTRUCTION: 3-LAYER FLOORING T&G

DIMENSIONS :			PACKAGING :	
			BOX	PALLET
Thickness	15 mm (5/8")	Content	2,26 m <sup>2</sup>	40 box (90,4 m <sup>2</sup> )
Width	190 mm (7 1/2")	Weigh	23 kg	946 kg
Length	600...2100 (2'...7')	H x W x L	100 x 225 x 2 165 mm	1134 x 905 x 2 165 mm
Average length	1.19 m (3 7/8')	Content	24,318 sq.ft.	972,704 sq.ft.
Microlevel	0,5 mm	Weigh	24 lb	958 lb
Joint type	T&G	H x W x L	4" x 9" x 86" mm	46" x 33" x 86" mm

### DEVIATIONS:

Deviation on Thickness	± 0,2 mm	EN 13489 FOCT 862.3
Deviation on Width	± 0,2 mm	
Height Difference	≤ 0,2 mm on 100 mm length	
Cup	≤ 0,2 % of width	EN 13489
Bow	≤ 0,5 % of length	
Spring	≤ 0,1 % of length	

### CHARACTERISTICS:

Fire resistance	Dfl-s1	EN 14342
Formaldehyde emission class	E1	
Pentachlorophenol content	None	
Thermal resistance	0,095 m <sup>2</sup> K/W	
Thermal conductivity	0,158 W/(m·K)	
Structural warranty	Lifetime	

### УСТАНОВКА:



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level.

### УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



— Air humidity 40% – 65%  
— Temperature +18 °C – +22 °C

### FINISH : LACQUER FINISH

DESCRIPTION :	
Type of coating	UV-curable polyurethane-acrylate with micro-corundum
Surface (finish) type	Closed pores
Sheen	Semigloss, 30-40 GU-60°
Finish warranty	25 years

### CLASSIFICATION SURFACE CHARACTERISTICS:

Wear resistance	Taber Test - 500 turns (S 42; 1000 gr)	EN 438-2
Scratch resistance	Rating 3	EN 438
Slip resistance	46 (SRV dry)	EN 15676
Resistance to chemical agents	Class 5 (Except blue ink)	EN 13442
Repairability	Low	

### MAINTENANCE AND CARE CONDITIONS :

Maintenance of hardwood floors with lacquer CosNanoTech+ finish assumes regular (daily if necessary) cleaning from dust and dirt using a vacuum, followed by a thorough cleaning using Coswick hardwood floor cleaner or other similar product. Due to high wear resistance properties, CosNanoTech+ lacquer finish does not require any additional care or finish renewal throughout the entire life of the floor.

### GRADE : SELECT & BETTER

DESCRIPTION:		DESCRIPTION:	
Sound sapwood	Non-contrasting up to 25% of plank width allowed	Bark pocket	Permitted up to 10 mm in length, up to 3 mm in width, filled
Colour variation	Permitted slight colour variation	Pith	Permitted healthy heart
Knot	Permitted up to 10 mm, filled	Slope of grain	Permitted
Crecks	Not permitted	Medullary ray	Permitted

### COSWICK Ltd.

2B Kolasa Str., 223034 Zaslavl, Republic of Belarus  
Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com  
www.coswick.com

