





MOSAIC WOOD FLOORS FLOORS | TECHNICAL INFORMATION

Product # 1393-1101-30

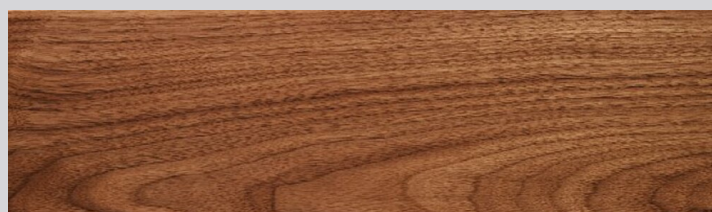

AMERICAN WALNUT COLLECTION DECOR | NATURAL

Wood species | American Walnut
Selection | Select & Better
Pattern | Tile
Constructions | 3-layer flooring T&G
Size | 19,05x190x220 mm (3/4"x7 1/2"x8 5/8")
Finish | Lacquer finish

CONSTRUCTION: 3-LAYER FLOORING T&G

DIMENSIONS :			PACKAGING :	
			BOX	PALLET
Thickness	19,05 mm (3/4")	Content	1,257 m2	40 box (50,28 m2)
Width	190 mm (7 1/2")	Weigh	16 kg	653 kg
Length	220 mm (8 5/8")	H x W x L	195 x 405 x 470 mm	1113 x 800 x 1 880 mm
Microbevel	0,5 mm	Content	13,525 sq.ft.	541,013 sq.ft.
Joint type	T&G	Weigh	16 lb	678 lb
		H x W x L	8" x 16" x 22" mm	44" x 32" x 74" mm

DEVIATIONS:

Deviation on Thickness	± 0,2 mm	EN 13489 ГОСТ 862.3
Deviation on Length	± 0,3 mm	
Deviation on Width	± 0,2 mm	
Angle deviation of planks	≤ 0,25 mm	
Cup	≤ 0,2 % of width	EN 13489
Bow	≤ 0,5 % of length	
Spring	≤ 0,1 % of length	

CHARACTERISTICS:

Fire resistance	Dfl-s1	EN 14342
Formaldehyde emission class	E1	
Pentachlorophenol content	None	
Thermal resistance	0,118 m2·K/W	
Thermal conductivity	0,161 W/(m·K)	
Structural warranty	Lifetime	

УСТАНОВКА:



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level.

УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



— Air humidity 40% – 65%
 — Temperature +18 °C – +22 °C

FINISH : LACQUER FINISH

DESCRIPTION :	
Type of coating	UV-curable polyurethane-acrylate with micro-corundum
Surface (finish) type	Closed pores
Sheen	Semigloss, 30-40 GU-60°
Finish warranty	25 years

CLASSIFICATION SURFACE CHARACTERISTICS:

Wear resistance	Taber Test - 500 turns (S 42; 1000 gr)	EN 438-2
Scratch resistance	Rating 3	EN 438
Slip resistance	46 (SRV dry)	EN 15676
Resistance to chemical agents	Class 5 (Except blue ink)	EN 13442
Repairability	Low	

MAINTENANCE AND CARE CONDITIONS :

Maintenance of hardwood floors with lacquer CosNanoTech+ finish assumes regular (daily if necessary) cleaning from dust and dirt using a vacuum, followed by a thorough cleaning using Coswick hardwood floor cleaner or other similar product. Due to high wear resistance properties, CosNanoTech+ lacquer finish does not require any additional care or finish renewal throughout the entire life of the floor.

GRADE : SELECT & BETTER

DESCRIPTION:		DESCRIPTION:	
Sound sapwood	Non-contrasting up to 25% of plank width allowed	Bark pocket	Permitted up to 10 mm in length, up to 3 mm in width, filled
Colour variation	Permitted slight colour variation	Pith	Permitted healthy heart
Knot	Permitted up to 10 mm, filled	Slope of grain	Permitted
Cracks	Not permitted	Medullary ray	Permitted

COSWICK Ltd.

2B Kolasa Str., 223034 Zaslavl, Republic of Belarus
 Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com
 www.coswick.com

