




PLANK HARDWOOD FLOORING | TECHNICAL INFORMATION

Product # 1163-7821-30



DARK WOOD COLLECTION

DECOR | OLD VENICE

Wood species | Oak

Selection | Character

Constructions | 3-layer flooring T&G

Size | 19,05x190x600...2100 mm (3/4"x7 1/2"x2'...7')


Finish | Silk mat finish

CONSTRUCTION: 3-LAYER FLOORING T&G

DIMENSIONS :

Thickness	19,05 mm (3/4")
Width	190 mm (7 1/2")
Length	600...2100 (2'...7')
Average length	1.22 m (4')
Microbevel	0,5 mm
Joint type	T&G

Solid wood lamella 3,2 mm
 Birch middle core 12,75 mm
 Solid wood lamella 3,1 mm
 Cork compensators

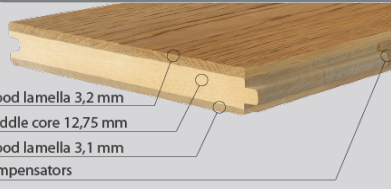

PACKAGING :

	BOX	PALLET
Content	1,86 m2	40 box (74,4 m2)
Weigh	23 kg	950 kg
H x W x L	100 x 225 x 2 165 mm	1134 x 905 x 2 165 mm
Content	20,014 sq.ft.	800,544 sq.ft.
Weigh	24 lb	962 lb
H x W x L	4" x 9" x 86" mm	46" x 33" x 86" mm

DEVIATIONS:

Deviation on Thickness	± 0,2 mm	
Deviation on Width	± 0,2 mm	EN 13489
Height Difference	≤ 0,2 mm on 100 mm length	ГОСТ 862.3
Cup	≤ 0,2 % of width	
Bow	≤ 0,5 % of length	
Spring	≤ 0,1 % of length	EN 13489

CHARACTERISTICS:

Fire resistance	Dfl-s1	
Formaldehyde emission class	E1	
Pentachlorophenol content	None	EN 14342
Thermal resistance	0,082 m2-K/W	
Thermal conductivity	0,161 W/(m-K)	
Structural warranty	Lifetime	

УСТАНОВКА:



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level. Suitable for installation over radiant heating systems.

УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



— Air humidity 40% – 65%
— Temperature +18 °C – +22 °C

FINISH : SILK MAT FINISH

GRADE : CHARACTER

DESCRIPTION:

Sound sapwood	Up to 25% of board width is allowed
Colour variation	Moderate contrast allowed
Knot	Permitted big, filled
Crecks	Permitted wide, filled

DESCRIPTION:

Bark pocket	No limit (after filling)
Pith	Permitted
Slope of grain	Permitted
Medullary ray	Permitted

COSWICK Ltd.

28 Kolasa Str., 223034 Zaslavl, Republic of Belarus

Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com

www.coswick.com

