





# CHEVRON 45° | TECHNICAL INFORMATION

Product # 1169-4805-30

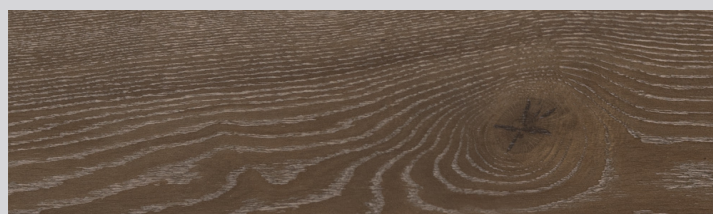

## DESIGNER SOLUTION COLLECTION DECOR | RAUCHTOPAZ

**Wood species** | Oak  
**Selection** | Tavern  
**Pattern** | Chevron  
**Constructions** | 3-layer flooring T&G  
**Size** | 15x107,95x530 mm (5/8"x4 1/4"x20 7/8")  
**Finish** | Silk mat finish

### CONSTRUCTION: 3-LAYER FLOORING T&G

DIMENSIONS :			PACKAGING :	
			BOX	PALLET
Thickness	15 mm (5/8")	Content	1,72 m2	42 box (72,24 m2)
Width	107,95 mm (4 1/4")	Weigh	18 kg	763 kg
Length	530 mm (20 7/8")	H x W x L	155 x 340 x 677 mm	1230 x 680 x 2 020 mm
Cut angle	45°	Content	18,507 sq.ft.	777,302 sq.ft.
Microbevel	0,5 mm	Weigh	18 lb	788 lb
Joint type	T&G	H x W x L	6" x 14" x 27" mm	49" x 27" x 80" mm

### DEVIATIONS:

Deviation on Thickness	± 0,2 mm	EN 13489 ГОСТ 862.3
Deviation on Length	± 0,3 mm	
Deviation on Width	± 0,2 mm	
Angle deviation of planks	≤ 0,25 mm	
Cup	≤ 0,2 % of width	EN 13489
Bow	≤ 0,5 % of length	
Spring	≤ 0,1 % of length	

### CHARACTERISTICS:

Fire resistance	Dfl-s1	EN 14342
Formaldehyde emission class	E1	
Pentachlorophenol content	None	
Thermal resistance	0,095 m2 K/W	
Thermal conductivity	0,158 W/(m·K)	
Structural warranty	Lifetime	

### УСТАНОВКА:



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level. Suitable for installation over radiant heating systems.

### УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



— Air humidity 40% – 65%  
— Temperature +18 °C – +22 °C

### FINISH : SILK MAT FINISH

### GRADE : TAVERN

DESCRIPTION:		DESCRIPTION:	
Sound sapwood	Up to 25% of board width is allowed	Bark pocket	No limit (after filling)
Colour variation	Moderate contrast allowed	Pith	Permitted
Knot	Permitted big, filled	Slope of grain	Permitted
Crecks	Permitted wide, filled	Medullary ray	Permitted

#### COSWICK Ltd.

2B Kolasa Str., 223034 Zaslavl, Republic of Belarus  
Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com  
www.coswick.com

