





# PLANK HARDWOOD FLOORING | TECHNICAL INFORMATION

Product # 1172-3825-10

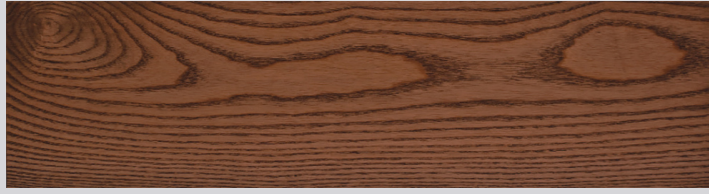

## DARK WOOD COLLECTION

DECOR | STONEY CREEK

Wood species | Oak

Selection | 1 Natur

Constructions | 3-layer flooring T&G


Size | 15x190x600...2100 mm (5/8"x7 1/2"x2'...7')

Finish | Silk mat finish

## CONSTRUCTION: 3-LAYER FLOORING T&G

### DIMENSIONS :

Thickness	15 mm (5/8")
Width	190 mm (7 1/2")
Length	600...2100 (2'...7')
Average length	1.19 m (3 7/8')
Microbevel	0,5 mm
Joint type	T&G

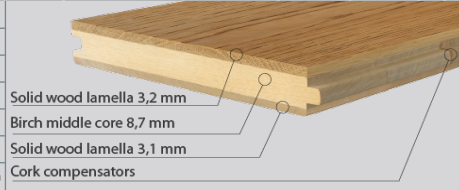

### PACKAGING :

	BOX	PALLET
Content	2,26 m2	40 box (90,4 m2)
Weigh	23 kg	946 kg
H x W x L	100 x 225 x 2 165 mm	1134 x 905 x 2 165 mm
Content	24,318 sq.ft.	972,704 sq.ft.
Weigh	24 lb	958 lb
H x W x L	4" x 9" x 86" mm	46" x 33" x 86" mm


### DEVIATIONS:

Deviation on Thickness	± 0,2 mm	
Deviation on Width	± 0,2 mm	EN 13489
Height Difference	≤ 0,2 mm on 100 mm length	ГОСТ 862.3
Cup	≤ 0,2 % of width	
Bow	≤ 0,5 % of length	
Spring	≤ 0,1 % of length	EN 13489

### CHARACTERISTICS:

Fire resistance	Dfl-s1	
Formaldehyde emission class	E1	
Pentachlorophenol content	None	EN 14342
Thermal resistance	0,095 m2 K/W	
Thermal conductivity	0,158 W/(m·K)	
Structural warranty	Lifetime	

### УСТАНОВКА:



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level. Suitable for installation over radiant heating systems.

### УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



— Air humidity 40% – 65%  
— Temperature +18 °C – +22 °C

## FINISH : SILK MAT FINISH

## GRADE : 1 NATUR

DESCRIPTION:		DESCRIPTION:	
Sound sapwood	Non-contrasting sapwood is allowed up to 25% of board width	Bark pocket	Permitted, restored up to 50 x 5 mm
Colour variation	Permitted slight colour variation	Pith	Permitted
Knot	Permitted up to 35 mm, filled	Slope of grain	Permitted
Cracks	Permitted narrow, filled	Medullary ray	Permitted

### COSWICK Ltd.

2B Kolasa Str., 223034 Zaslavi, Republic of Belarus

Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com

www.coswick.com

