


# **COSWICK SPORTS FLOORING**

## Matrix Sport®

High performance Sports flooring with 3-layer engineered floorboards' top layer; intended for interiors used for training and holding all levels of sports competitions, including international tournaments in team sports, such as basketball, volleyball, handball, squash. Distinguished by a reduced deformation zone.

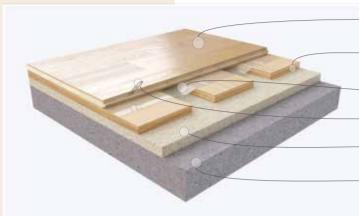

Coswick 3-layer engineered hardwood flooring for sports

(thickness 15 mm)

Coswick resilient batten

(thickness 12 mm)

Hydroisolating polyethylene film

Bracket

Shock-absorbing underlayment

(thinkness 15 mm)

#### Intended Use

Product is intended for speciality indoor courts used for team sports and ball games; recommended for interiors with strict requirements in regards to the technical characteristics of the floor.

#### Technology

3-layer engineered flooring manufactured from hard wood species installed over shock-absorbing cross-laid batten system with high performance resilient shock-absorbing elements. Product has "deck"-style surface pattern.

#### Compliance with

Shock absorption, % Vertical deformation, mm Friction, nominal unit Ball bounce, % Rolling load, mm 60 | EN 14808 (A4 ≥55% <75%)

2,8 | EN 14809 (A4 ≥2,3 <5,0)

97 | EN 13036-4 (80-110)

94 | EN 12235 (≥90%)

0,15 EN 1569 (≤ 0,5 mm, min. 1500 H)

### Top Layer

Species Construction Dimensions Oak, ash

3-layer engineered hardwood floor board  $15 \times 127 \times 600...2100$  mm

## Subfloor

Shock-absorbing cross-laid batten system with high performance resilient shock-absorbing elements.

## System Type


Permanent stationary system, installed using floating method.

#### Warranties


Lifetime Structural Integrity Warranty

#### Coswick Ltd. Republic of Belarus 2B Kolasa Str. 223034 Zaslavl Tel. +375-17-543-2020 E-mail: sales@coswick.com www.coswick.com

## Baseboard and Reducer

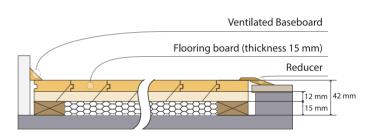

## Serviceable Cable Channel



## **Breakout Box**

