





PLANK HARDWOOD FLOORING | TECHNICAL INFORMATION

Product # 1154-1825-10

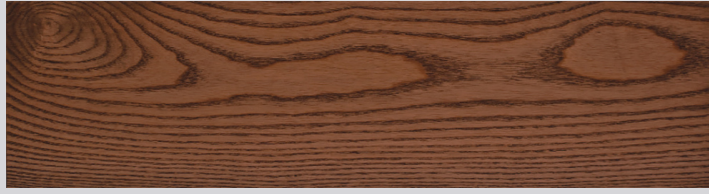

DARK WOOD COLLECTION DECOR | STONEY CREEK

Wood species | Oak
Selection | Select & Better
Constructions | 3-layer flooring T&G
Size | 19,05x127x600...2100 mm (3/4"x5"x2'...7')
Finish | Silk mat finish

CONSTRUCTION: 3-LAYER FLOORING T&G

DIMENSIONS :			PACKAGING :	
			BOX	PALLET
Thickness	19,05 mm (3/4")	Content	2 m ²	36 box (72 m ²)
Width	127 mm (5")	Weight	25 kg	917 kg
Length	600...2100 (2'...7')	H x W x L	90 x 275 x 2 155 mm	1156 x 846 x 2 163 mm
Average length	0.98 m (3 1/4')	Content	21,520 sq.ft.	774,720 sq.ft.
Microlevel	0,5 mm	Weight	26 lb	929 lb
Joint type	T&G	H x W x L	4" x 11" x 85" mm	46" x 33" x 86" mm

DEVIATIONS:

Deviation on Thickness	± 0,2 mm	EN 13489 ГОСТ 862.3
Deviation on Width	± 0,2 mm	
Height Difference	≤ 0,2 mm on 100 mm length	
Cup	≤ 0,2 % of width	EN 13489
Bow	≤ 0,5 % of length	
Spring	≤ 0,1 % of length	

CHARACTERISTICS:

Fire resistance	Dfl-s1	EN 14342
Formaldehyde emission class	E1	
Pentachlorophenol content	None	
Thermal resistance	0,082 m ² ·K/W	
Thermal conductivity	0,161 W/(m·K)	
Structural warranty	Lifetime	

УСТАНОВКА:



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level. Suitable for installation over radiant heating systems.

УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



— Air humidity 40% – 65%
— Temperature +18 °C – +22 °C

FINISH : SILK MAT FINISH

GRADE : SELECT & BETTER

DESCRIPTION:		DESCRIPTION:	
Sound sapwood	Non-contrasting sapwood is allowed up to 25% of plank area	Bark pocket	Permitted up to 10 mm in length, up to 3 mm in width, filled
Colour variation	Permitted slight colour variation	Pith	Permitted healthy heart
Knot	Permitted up to 10 mm, filled	Slope of grain	Permitted
Crecks	Not permitted	Medullary ray	Permitted

COSWICK Ltd.

28 Kolasa Str., 223034 Zaslavl, Republic of Belarus

Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com

www.coswick.com

