





CHEVRON 45° | TECHNICAL INFORMATION

Product # 1175-1825-10

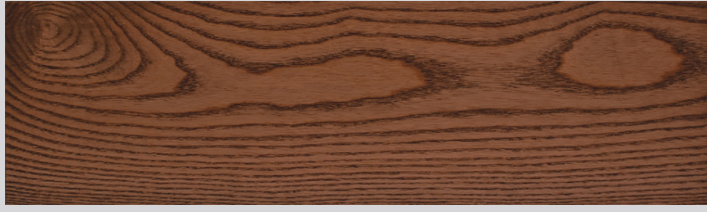

DARK WOOD COLLECTION DECOR | STONEY CREEK

Wood species | Oak
Selection | Select & Better
Pattern | Chevron
Constructions | 3-layer flooring T&G
Size | 15x127x500 mm (5/8"x5"x19 11/16")
Finish | Silk mat finish

CONSTRUCTION: 3-LAYER FLOORING T&G

DIMENSIONS :			PACKAGING :		
			BOX	PALLET	
Thickness	15 mm (5/8")		Content	1,27 m2	54 box (68,58 m2)
Width	127 mm (5")		Weigh	13 kg	738 kg
Length	500 mm (19 11/16")		H x W x L	155 x 275 x 675 mm	1080 x 832 x 2 050 mm
Cut angle	45°		Content	13,665 sq.ft.	737,921 sq.ft.
Microbevel	0,5 mm		Weigh	14 lb	762 lb
Joint type	T&G		H x W x L	6" x 11" x 27" mm	43" x 33" x 81" mm

DEVIATIONS:		EN 13489 ГОСТ 862.3
Deviation on Thickness	± 0,2 mm	
Deviation on Length	± 0,3 mm	
Deviation on Width	± 0,2 mm	
Angle deviation of planks	≤ 0,25 mm	
Cup	≤ 0,2 % of width	
Bow	≤ 0,5 % of length	EN 13489
Spring	≤ 0,1 % of length	

CHARACTERISTICS:		EN 14342
Fire resistance	Dfl-s1	
Formaldehyde emission class	E1	
Pentachlorophenol content	None	
Thermal resistance	0,095 m2 K/W	
Thermal conductivity	0,158 W/(m·K)	
Structural warranty	Lifetime	

УСТАНОВКА:



Glue down over concrete, plywood or wooden subfloor or nail down over wooden subfloor. Applicable above, on and below ground level. Suitable for installation over radiant heating systems.

УСЛОВИЯ ЭКСПЛУАТАЦИИ И ХРАНЕНИЯ:



— Air humidity 40% – 65%
— Temperature +18 °C – +22 °C

FINISH : SILK MAT FINISH

GRADE : SELECT & BETTER

DESCRIPTION:		DESCRIPTION:	
Sound sapwood	Non-contrasting sapwood is allowed up to 25% of plank area	Bark pocket	Permitted up to 10 mm in length, up to 3 mm in width, filled
Colour variation	Permitted slight colour variation	Pith	Permitted healthy heart
Knot	Permitted up to 10 mm, filled	Slope of grain	Permitted
Crecks	Not permitted	Medullary ray	Permitted

COSWICK Ltd.

2B Kolasa Str., 223034 Zaslavl, Republic of Belarus
Tel.: +375-17-543-2012, Fax: +375-17-543-2020, E-mail: sales@coswick.com
www.coswick.com

